


Planetary Gearbox - 22 mm Ø



Economical Sintered Metal Construction - Ball

Global Motion Products

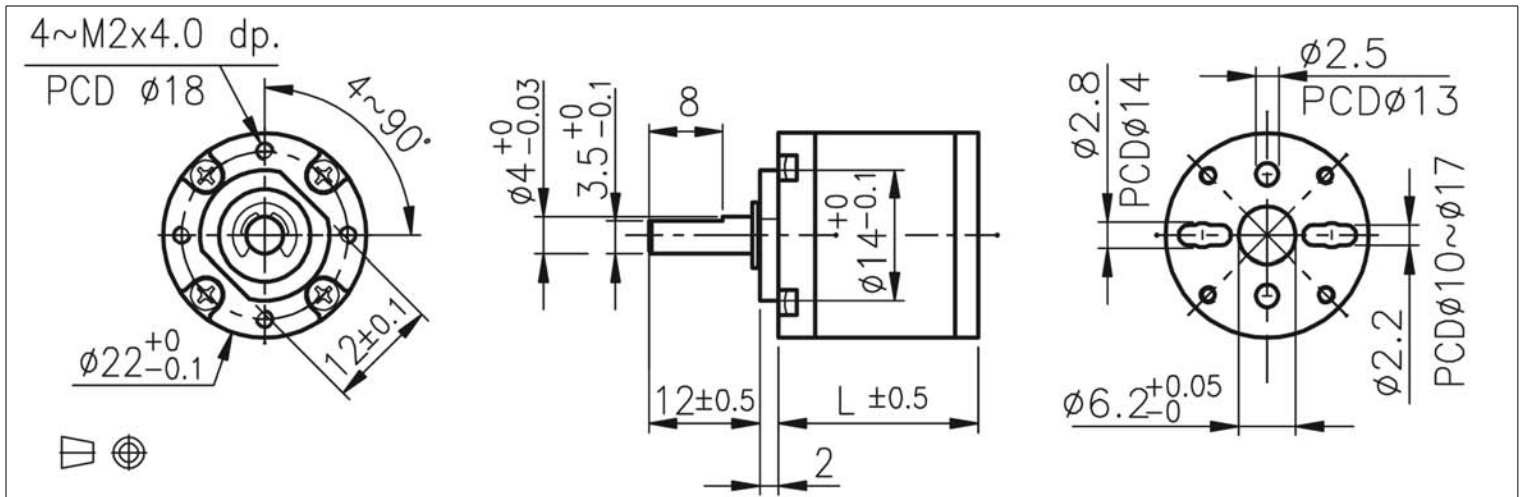

Not to Scale - Dimensions in millimeters (mm)

Ratio	Efficiency %	Continuous Torque mNm	Momentary Torque mNm	Length L mm	Mass grams	Direction of Rotation*	Order Part Number
4.38:1	80 %	0.10 Nm	0.29 Nm	14.40	26.0	Same	P220004AB00
14.06:1	70 %	0.15 Nm	0.44 Nm	18.05	31.0	Same	P220014AS00
16.44:1	70 %	0.15 Nm	0.44 Nm	18.05	30.0	Same	P220016AB00
19.21:1	70 %	0.15 Nm	0.44 Nm	18.05	34.0	Same	P220019AB00
61.66:1	70 %	0.20 Nm	0.59 Nm	21.70	34.0	Same	P220062AB00
84.29:1	70 %	0.20 Nm	0.59 Nm	21.70	34.0	Same	P220084AB00
103.81:1	70 %	0.20 Nm	0.59 Nm	21.70	39.0	Same	P220104AB00
231.22:1	50 %	0.25 Nm	0.74 Nm	25.35	39.0	Same	P220231AB00
270.35:1	50 %	0.25 Nm	0.74 Nm	25.35	40.0	Same	P220270AB00
316.10:1	50 %	0.25 Nm	0.74 Nm	25.35	39.0	Same	P220316AB00
369.59:1	50 %	0.25 Nm	0.74 Nm	25.35	39.0	Same	P220370AB00
455.19:1	50 %	0.25 Nm	0.74 Nm	25.35	39.0	Same	P220455AB00
1,013.81:1	40 %	0.29 Nm	0.88 Nm	29.00	43.0	Same	P221014AB00
1,620.53:1	40 %	0.29 Nm	0.88 Nm	29.00	43.0	Same	P221621AB00

Radial Load Rating	≤ 9.8 N	Radial Play	≤ 0.04 mm	Max Temperature Operating	60°C
Radial Load Distance	10 mm	Axial Play	≤ 0.20 mm	Min Temperature Operating	-10°C
Axial Load	≤ 5.9 N	Backlash	≤ 3.0 °	Relative Humidity Operating	20% to 85%
Press Fit Force - Max	≤ 49.0 N			Bearing	Ball

The P22-AS Series offers Low Cost Iron Core DC Motors & Low Power 2 Track Magnetic Encoders - 3.5 to 20 V, 5 to 10 mA. Or 3 Channel Optical encoders with current sipping Coreless DC Motors. BLDC Motors including 2 wire are another option. GMP offers gearboxes and gearmotors from 6 mm diameter to 90 mm.

Options

Lubes. Bearings. Coreless, Iron Core, & BLDC Motors. Plastic or metal gear first stage. Motors w/ encoders. Connectors, Custom wiring harness. Special Shafts. For Low Backlash, Ball Bearings, & Hardened Stainless Steel Shafts refer to our highly refined 0.5° backlash all metal P22 Series. * Rotational Sense of Gearbox Output Shaft to Motor Shaft

Global Motion Products

Distributed by:

Precision Motion Distributors: (925) 803-9565

Technical Support: (760) 451-2723

http://www.gmpwebsite.com Email: info@gmpwebsite.com

Manufactured under a Certified ISO 9001 :
2008 Quality System and ISO 14001
Environmental Management System.

RoHS Compliant

D - March 2014


Specifications Subject to change without notice

Planetary Gearbox - 22 mm Ø



Global Motion Products

Economical Sintered Metal Construction - Ball

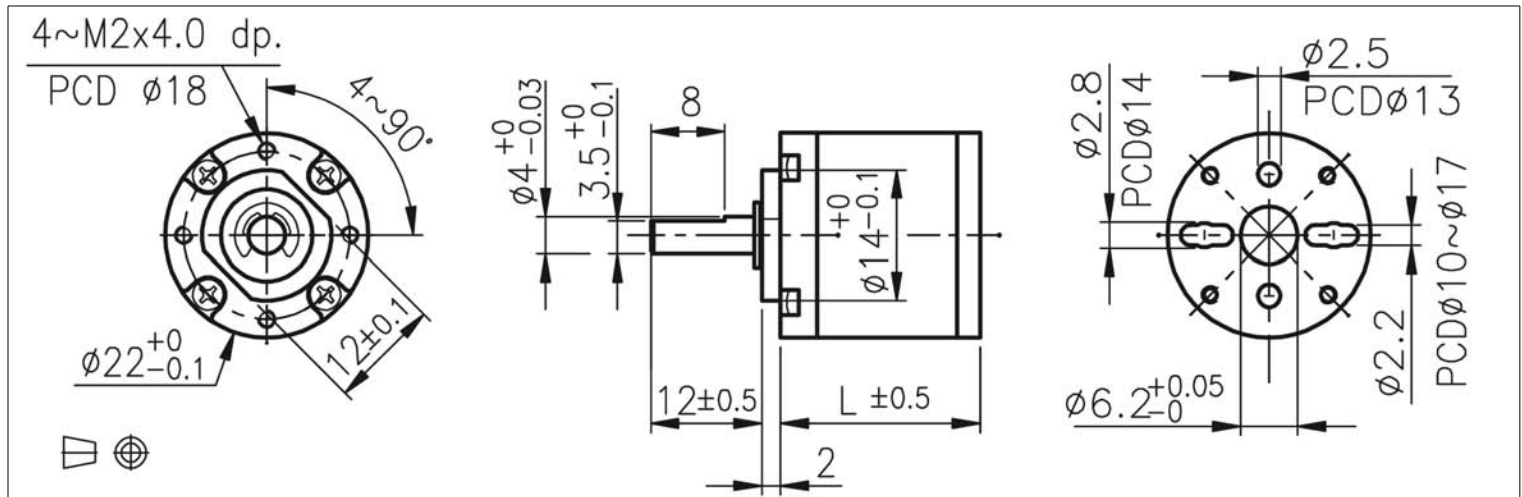

Not to Scale - Dimensions in millimeters (mm)

Ratio	Efficiency %	Continuous Torque mNm	Momentary Torque mNm	Length L mm	Mass grams	Direction of Rotation*	Order Part Number
1,995.81:1	40 %	0.29 Nm	0.88 Nm	29.00	43.0	Same	P221996AB00
3,027.22:1	40 %	0.29 Nm	0.88 Nm	29.00	44.0	Same	P223027AB00

Radial Load Rating	≤ 7.8 N	Radial Play	≤ 0.04 mm	Max Temperature Operating	60°C
Radial Load Distance	10 mm	Axial Play	≤ 0.20 mm	Min Temperature Operating	-10°C
Axial Load	≤ 5.9 N	Backlash	$\leq 3.0^\circ$	Relative Humidity Operating	20% to 85%
Press Fit Force - Max	≤ 49.0 N			Bearing	Sleeve

The P22-AS Series offers Low Cost Iron Core DC Motors & Low Power 2 Track Magnetic Encoders - 3.5 to 20 V, 5 to 10 mA. Or 3 Channel Optical encoders with current sipping Coreless DC Motors. BLDC Motors including 2 wire are another option. GMP offers gearboxes and gearmotors from 6 mm diameter to 90 mm.

Options

Lubes. Bearings. Coreless, Iron Core, & BLDC Motors. Plastic or metal gear first stage. Motors w/ encoders. Connectors, Custom wiring harness. Special Shafts. For Low Backlash, Ball Bearings, & Hardened Stainless Steel Shafts refer to our highly refined 0.5° backlash all metal P22 Series.
* Rotational Sense of Gearbox Output Shaft to Motor Shaft

Global Motion Products

Distributed by:

Precision Motion Distributors: (925) 803-9565

Technical Support: (760) 451-2723

<http://www.gmpwebsite.com> Email: info@gmpwebsite.com

Manufactured under a Certified ISO 9001 :
2008 Quality System and ISO 14001
Environmental Management System.

RoHS Compliant